

Bi-Fold System

Transmittance

Uw from 1,1 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 45 mm

Finishes

Possibility of dual colour

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207): Class 4

Water tightness
(EN 12208): Class 9A

Wind resistance
(EN 12210): Class A3
Reference test 3 sashes. Configuration 330. 2701 x 2517 mm

Security Test
(PAS 24): APT **PAS24**
Reference test 2701 x 2517 mm. 3 sashes. Configuration 330



Sections

Frame 73 mm


Sash 73 mm

Profile thickness


Door 1,8 mm

Polyamide strip length

Frame 20 mm Sash 30 mm

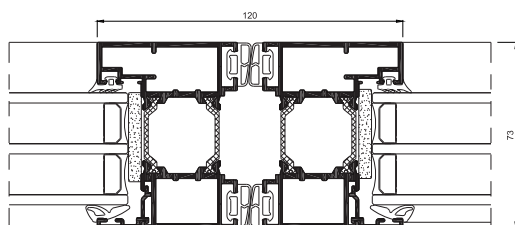

Opening possibilities



Inwards: Bi-fold until 2 to 14 sashes
Possibility of corner sash at 90° without mullion

Maximum dimensions/sash

Width (L) = 1200 mm
Height (H) = 3000 mm

Consult maximum weight and dimensions according to typologies

Maximum weight/sash

120 Kg