

Cor Vision Plus Sliding System Thermally Broken

Transmittance

Uw from 0,9 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 54 mm

Maximum acoustic insulation **Rw = 43 dBA**

Categories achieved at test centre

Air permeability
(EN 12207): Class 4

Water tightness
(EN 12208): Class 7A* / 9A**

Wind resistance
(EN 12210): Class C3

*Reference test balcony 4,00 x 3,00 m, 2 sashes.

**Reference test balcony 4,00 x 3,00 m, 1 sash + 1 fixed light.

Finishes

Possibility of dual colour
Colour powder coating (RAL, mottled and rough)
Wood effect powder coating
Anti-bacterial powder coating
Anodized




Sections

Frame 180 mm
3 Rails 278 mm
Sash 69 mm



Profile thickness

Door 2,0 mm


Polyamide strip length Frame 40 mm
Sash 18 - 32 mm

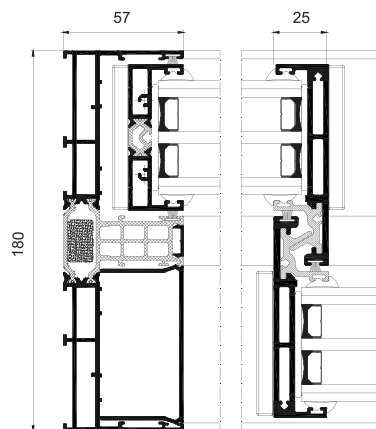

New Solution - Hidden Rail



Opening possibilities

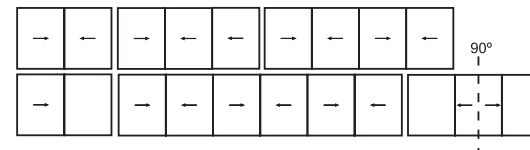

Sliding of 1, 2, 3, 4 & 6 sashes
Possibility of 1, 2 or 3 rails
Possibility of interior and exterior corner sash at 90° without mullion
Galandage possibility in 1, 2, 3 & 4 sashes

Maximum dimensions/sash

Width (L) = 4000 mm
Height (H) = 4000 mm
Glass surface ≤ 14 m²

Consult maximum weight and dimensions according to typologies

Maximum weight/sash

400 Kg Manual
700 Kg Motorized